



ELEVATION

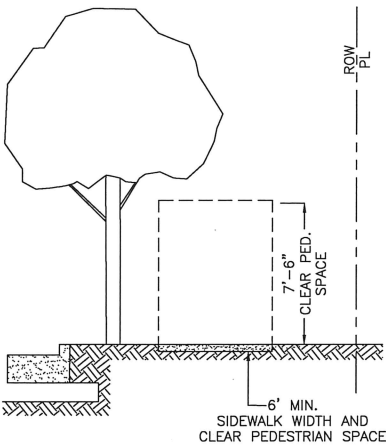


ELEVATION

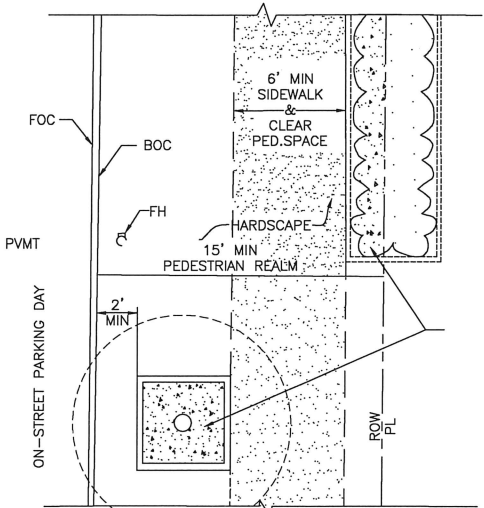

PLAN

PEDESTRIAN REALM PERFORMANCE STANDARD

SOFTSCAPE  
(≤20% OF SURFACE AREA OF  
PEDESTRIAN REALM)

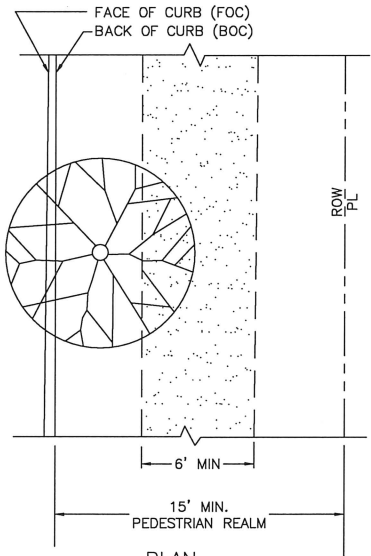


PLAN

SIDEWALK & CLEAR PEDESTRIAN ZONE  
MANDATORY MINIMUM REQUIREMENT


NOTES  
1. REFER TO CHAPTER 42 OF THE CODE OF ORDINANCES,  
ARTICLE IV - TRANSIT CORRIDOR DEVELOPMENT.

SIDEWALKS AND CLEAR ZONE TRANSIT CORRIDOR STREET  
NTS

- NOTE:
1. EXPOSE 15" OF REINFORCING STEEL AT PROPOSED SAWED JOINT. IF NO REINFORCING STEEL EXISTS, USE HORIZONTAL DOWELS. HORIZONTAL DOWELS SHALL BE # 6 BARS, 24" LONG, 24" C-C, DRILLED AND EMBEDDED 8" INTO THE CENTER OF THE EXISTING SLAB. WITH "PO ROC" OR EQUAL.
  2. IF REINFORCED CONCRETE IS OVERLAYED REPLACE WITH SAME THICKNESS OF HMAC SURFACING.
  3. REFER TO STANDARD DETAIL 02751-01 FOR REINFORCING STEEL REQUIREMENT
  4. REFER TO STANDARD DETAIL 02951-01 FOR PAVEMENT RESTORATION LIMITS.

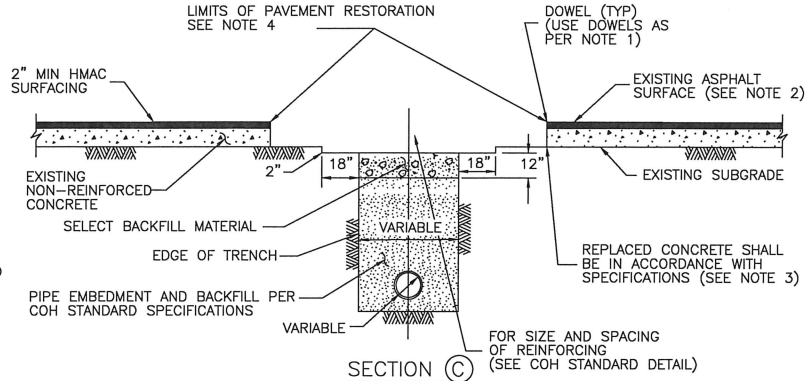


REPAIR OF NON-REINFORCED CONCRETE PAVEMENT

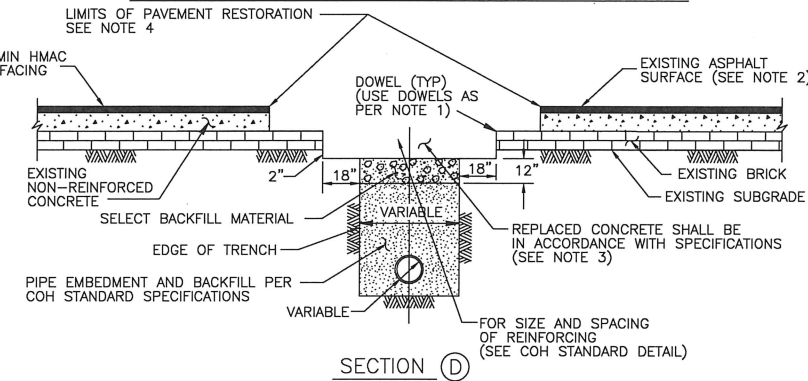


REPAIR OF NON-REINFORCED CONCRETE PAVEMENT WITH BRICK

PAVEMENT REPAIR DETAILS FOR STREET CUTS - NON REINFORCED CONCRETE AND BRICK PAVEMENT  
NTS

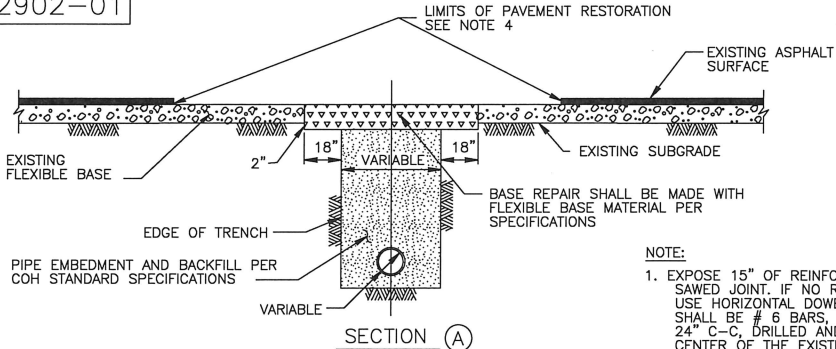

REPAIR OF FLEXIBLE BASE PAVEMENT

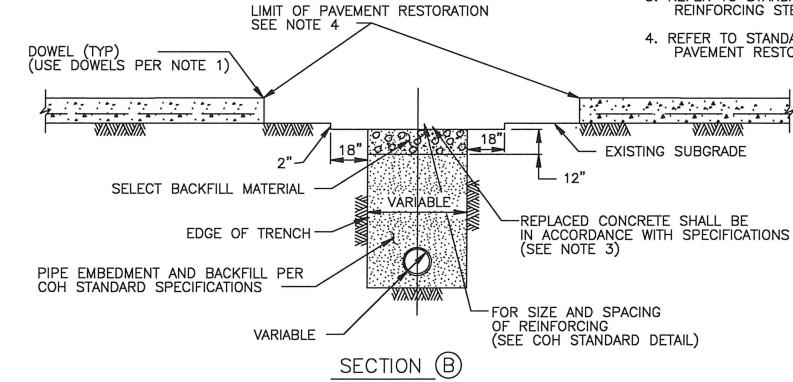

REPAIR OF REINFORCED CONCRETE PAVEMENT

PAVEMENT REPAIR DETAILS FOR STREET CUTS  
NTS

CITY OF HOUSTON  
HOUSTON PUBLIC WORKS

STREET PAVING AND SIDEWALK  
02775-08 THROUGH 02902-02

APPROVED BY: [Signature] CITY ENGINEER  
APPROVED BY: [Signature] DEPUTY DIRECTOR

APPROVED BY: [Signature] DIRECTOR OF HOUSTON PUBLIC WORKS

EFFECTIVE DATE: JUL-01-2020  
FOR CITY OF HOUSTON USE ONLY

SHEET NO.