



DISCLAIMER: THIS STANDARD IS GOVERNED BY THE TEXAS ENGINEERING PRACTICE ACT. THE DESIGN REQUIREMENTS ON THIS STANDARD DO NOT PURPORT TO ADDRESS ALL OF THE SAFETY CONCERNS ASSOCIATED WITH THE USE OF THIS STANDARD. THE ENGINEER OF RECORD (EOR) IS TO REVIEW THESE DESIGN REQUIREMENTS AND BY AUTHORIZING THEIR USE, ACCEPTS RESPONSIBILITY FOR THEIR APPLICABILITY, ADEQUACY AND SAFETY. NO WARRANTY OF ANY KIND IS MADE BY THE CITY OF HOUSTON FOR ANY PURPOSES WHATSOEVER. THE CITY OF HOUSTON ASSUMES NO RESPONSIBILITY FOR INCORRECT RESULTS OR DAMAGES RESULTING FROM ITS USE.




OCTAGONAL

A	B	C	D	T
24	3	3	12	0.08
36	3	3	24	0.08




DIAMOND

A	B	C	T
24	12	1 1/2	0.08
30	15	1 1/2	0.08
36	18	1 1/2	0.08




CIRCLE

A	B	T
15	15	0.08
18	12	0.08




PENTAGON (SCHOOL)

A	B	C	D	T
36	24	3	1 1/2	0.08

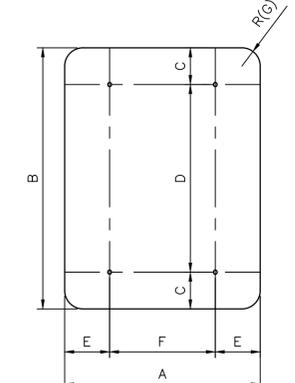


VERTICAL RECTANGLE

A	B	C	D	E	F	G	T
36	48	6	36	6	24	1 1/2	0.08
48	60	6	48	9	30	1 1/2	0.08
18	30	3	24	-	-	1 1/2	0.08




SQUARE (A)

A	B	C	D	T
18	3	12	1 1/2	0.08
24	3	18	1 1/2	0.08
36	3	30	1 1/2	0.08




VERTICAL/HORIZONTAL RECTANGLE

A	B	C	D	E	F	G	T
12	18	1 1/2	15	1 1/2	1 1/2	9	0.08
12	36	3	30	1 1/2	1 1/2	9	0.08
18	24	3	18	1 1/2	1 1/2	15	0.08
24	30	3	24	1 1/2	3	18	0.08
24	36	3	30	1 1/2	3	18	0.08
24	48	3	36	1 1/2	3	18	0.08
30	36	3	30	1 1/2	3	24	0.08




HORIZONTAL/VERTICAL RECTANGLE

A	B	C	D	E	F	G	T
12	6	-	-	1 1/2	1	4	0.08
18	6	-	-	1 1/2	1	4	0.08
12	9	1	10	1 1/2	-	-	0.08
24	12	1 1/2	9	1 1/2	2	8	0.08
24	18	3	12	1 1/2	2	14	0.08
30	24	3	18	1 1/2	3	18	0.08
36	12	1 1/2	9	1 1/2	2	8	0.08

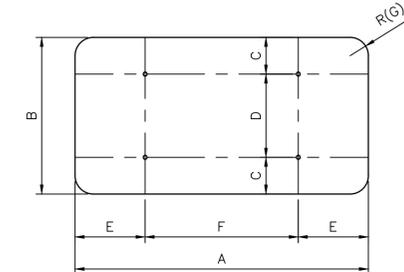

HORIZONTAL RECTANGLE

A	B	C	D	E	F	G	T
36	24	3	18	6	24	1 1/2	0.08
48	24	3	18	9	30	1 1/2	0.08
48	36	6	24	9	30	1 1/2	0.08
60	24	3	18	12	36	1 1/2	0.08
60	36	6	24	12	36	1 1/2	0.08



EQUILATERAL TRIANGLE

A	B	C	D	T
36	3	21	1 1/2	0.08

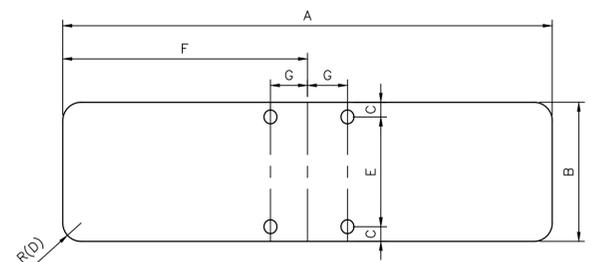



TABLE -- D3 SIGNS (BRACKETS)

A	B	C	D	E	F	G	T
30	9	5/16	1 1/2	8 3/8	15	1 3/4	0.125
36	9	5/16	1 1/2	8 3/8	18	1 3/4	0.125
42	9	5/16	1 1/2	8 3/8	21	1 3/4	0.125
48	9	5/16	1 1/2	8 3/8	24	1 3/4	0.125

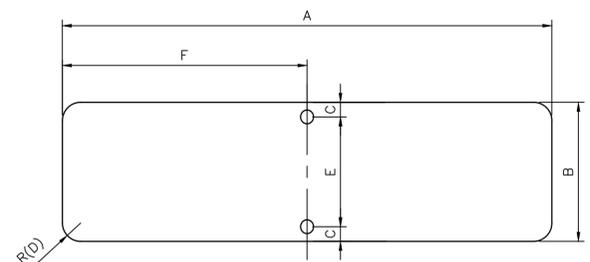


TABLE -- D3 SIGNS

A	B	C	D	E	F	T
30	9	1 1/2	1 1/2	6	15	0.125
36	9	1 1/2	1 1/2	6	18	0.125
42	9	1 1/2	1 1/2	6	21	0.125
48	9	1 1/2	1 1/2	6	24	0.125

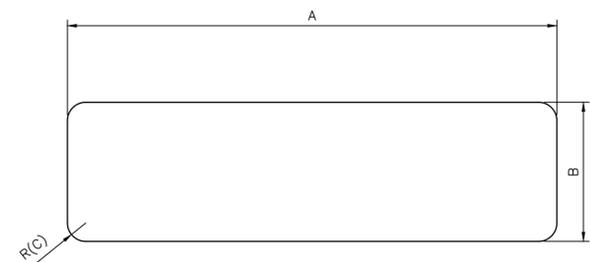


TABLE -- D1 SIGNS

A	B	C	T
60	24	1 1/2	0.08
72	24	1 1/2	0.08
84	24	1 1/2	0.08
96	24	1 1/2	0.08

NOTES:

1. A 30" LONG OR GREATER PLATE SHALL BE USED WHEN A "NO OUTLET" SUPPLEMENT IS REQUIRED.
2. THE CITY OF HOUSTON "STOP" AND "YIELD" SIGNS SHALL BE A MINIMUM 36". SPECIAL PERMISSION FROM THE CITY TRAFFIC ENGINEER IS REQUIRED FOR LESS THAN 36" SIGNS.
3. ALL PUNCHED HOLES ARE 3/8"x 1/2" OVAL.
4. ALL CORNER RADII ARE 1 1/2".
5. ALL DIMENSIONS ARE IN INCHES.
6. T = THICKNESS

APPROVED BY: <i>Suhail Kanwar</i> SEF800K41F5478	APPROVED BY: <i>KATHY NGUYEN</i> 9SAZ9EFDAT784C0
CITY ENGINEER	CITY TRAFFIC ENGINEER

APPROVED BY: <i>Carl Hallack</i> ASBCA1087263453
DIRECTOR OF HOUSTON PUBLIC WORKS

EFF DATE: NOV-27-2023	DWG NO: 01554-06
-----------------------	------------------

CITY OF HOUSTON
HOUSTON PUBLIC WORKS STANDARD

GROUND MOUNTED SIGN SIZES

	FOR CITY OF HOUSTON USE ONLY
DRAWING SCALE	
NOT TO SCALE	